

XXLED STRIP 20M

CODE: FLR.912

Only 1 reel... 20m ight!

Professional led strip.

Due to the high heat output, the strip must be mounted on a material with good thermal dissipation (eg metal); we recommend our aluminum PA Series profiles.

Bag package comprising: • 20m reels

• 2 power cord



Features

- 2835 SMD Led - 120 LED/m
- Selected bin colour
- Beam angle: 120°
- Minimum cutting section: 50 mm
- Extendible max: 20,000 mm
- Dimmable
- Colour rendering: >80
- Protection degree: IP20, for indoor use


- Working temperature: -20 +45°C
- Storage temperature: 0 +60°C
- Rear adhesive: 3M
- Material: copper/polyamide 2 layer
- Substrate colour: white
- Average life: 40,000 hours @T55°C
- Led operative life: L80B10

Technical data


Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
FLR.912.W	Bianco Freddo	6000°K	24V DC	2835 SMD	120	14,4	1720	119	20
FLR.912.D	Bianco Diurno	4000°K	24V DC	2835 SMD	120	14,4	1685	117	20

Accessori opzionali


ACCESSORIES FOR LED STRIPS	FLR.160.PC
DRIVER AND DIMMER	LB.700, LB.700.RF, NTG401, NTG400, VS3, RP2, SERIE CD, MD1, CTR2021, CTR1032, CTR2032, SLV401, OMN400, CTR217
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.241, PA.243, PA.245, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658



Data sheets

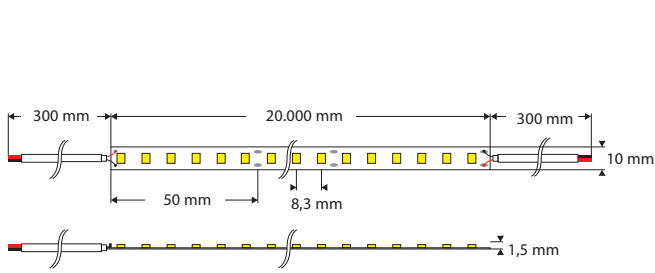

UNIT: cd
 ■ C0/180, 115.1 ■ C60/240, 116.8
 ■ C30/210, 115.7 ■ C90/270, 117.3



Height	Eavg, Emax	Angle: 115.15 deg	Diameter
1m	93.41, 341.3 lx		314.85 cm
2m	23.35, 85.34 lx		629.69 cm
3m	10.38, 37.93 lx		944.54 cm
4m	5.838, 21.33 lx		1259.38 cm
5m	3.736, 13.65 lx		1574.23 cm