

## Duo Dome



CODE: SL.300

Passive Infrared Detectors

Applied both indoor (corridor.s -stairs - toilets - cellar.s - boxes), and outdoor (IP 45).

With the DOME lens is obtained 240° detection angle, achieving protection against crawling penetration (curtain effect) and detection distance of about 12 meters.

Furthermore the detection range can be decreased by applying the covers. It is equipped with a support for installation on outer or inner angles.

IP45


## Features

- Power supply: 230 - 240 V- 50 Hz
- Load: 2000 W for incandescence lamps
- 1000 W halogen lamps
- 300 W far fluorescent lamps
- 200 W for LED lamps
- Detection angle: 240°
- Beam range: from 6 to 12 m
- Timer: from 10 sec. to 10 min.
- Twilight: from 5 to 2000 Lux
- Protection degree: IP 45
- LED to check detection
- Dimensions (h x l x d): 125 x 75 x 35 (60) mm
- Fitted with zero-crossing technology
- Colour: polar white

## Technical data

Article	Detection angle	Beam range	Protection degree
SL.300	240°	da 6 a 12 m	IP45

## Data sheets

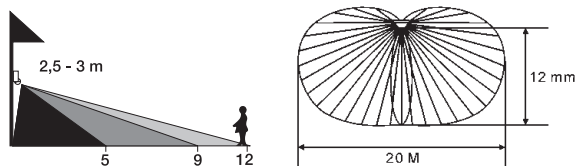

Domotics and appliances

